


Copper+ L54



BENEFITS

- ✓ prevents wear and sticking of screwed connections
- ✓ high thermal resistance
- ✓ prevents corrosion

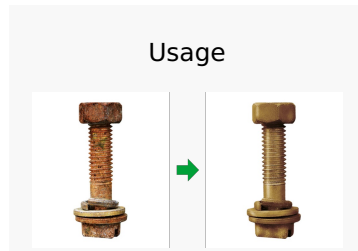

PRODUCT DESCRIPTION

BIZOL Copper+ L54 is a spray with a high copper content to prevent wear and sticking of screwed connections which are exposed to very high temperatures. It has a high thermal stability, prevents corrosion, is dirt repellent and weather resistant. It comes with an additional spray nozzle and an extension tube in the cap.

Copper+ L54

Available Packages

Size	Art. Nr
400 ml	80006

Technical Data

Name	Value	Method
Solid content	~ 31 %	
Basis	EP Grease and small copper particles	
Colour	copper like	
Scent	Characteristic	
Relative density at 20°C	0,8 g/ml	
Temperature resistant	-40 - +1100 °C	

Applications

Spray on brake parts, exhaust parts, battery poles, spark plugs, screwed connections, or parts exposed to high temperatures.

How to use

The aerosol should have room temperature. Best processing temperature 5 to 30°C. Before use, shake the aerosol. Apply copper grease. The specific lubrication property is achieved after evaporation of the solvent (approximately 1 minute).