


Leak and Smoke Stop+ o92



BENEFITS

- ✓ effectively seals small leaks in the oil system
- ✓ restores elasticity of all engine seals and reduces oil consumption
- ✓ prevents engine damage

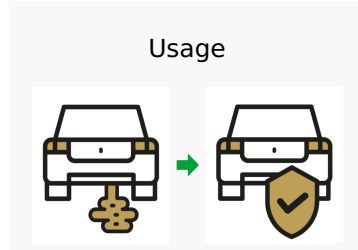

PRODUCT DESCRIPTION

BIZOL Leak and Smoke Stop+ o92 is specially developed to seal small leaks (hairline cracks) that have occurred due to material ageing of the seals in the engine. Material ageing can cause engine oil to enter the combustion chamber and produce harmful blue smoke. Blue smoke is harmful to the catalytic converter and diesel particulate filter. The specially developed seal conditioners restore elasticity to older gaskets and protect new gaskets from ageing.

Leak and Smoke Stop+ o92

Available Packages

Size	Art. Nr
250 ml	8887

Technical Data

Name	Value	Method
Appearance	slightly brown, clear	
Density at 15 °C	920 kg/m³	DIN EN ISO 12 185
Viscosity at 20 °C	330 mm²/s	
Viscosity at 40 °C	129 mm²/s	ASTM D 7042
Viscosity at 100 °C	25 mm²/s	ASTM D 7042
Viscosity index	250	ASTM D 2270
Flash Point	121 °C	
Pour Point	-30 °C	ISO 3016

How to use

A 250 ml can is efficient for up to 4 litres of engine oil and can be used at any time between oil changes. Add to the warm engine oil if oil consumption is very high. Compatible with all commercially available engine oils. Not suitable for motorcycles with wet clutches.