



ATF Intelligence 2000

Automatic Transmission Flush Technology



The machine features an **exclusive electronic control system** that lets you **replace ATF fluid** without having to open the completely empty gearbox, regardless of the difference in temperature between the fresh fluid and the used fluid.

In addition to controlling the operation of the pump of the ATF, the **machine's software monitors the fluid replacement operation**, checks whether the quantity contained in the fresh fluid tank is sufficient and whether the recovery tank can receive the used liquid.

Features:

- Automatic detection of the direction of fluid flow
- Absolute accuracy in the exchange fluid, temp. compensation not needed
- Digital fluid measurement
- Fully automatic cleaning additive insertion
- Auto setting specific weight of lubricants
- Extremely high precision, 3,0gr. on 10 liters
- Requires only one operator
- High power flow pump with auto fine adjustment, 0.1 - 4 liters/minute
- 2 Connecting hoses, length: 4,0 mt.
- Universal adapters kit for European American and Asian cars
- Continuous updating of adapters
possible construction of fittings on design

Benefits:

- ✓ Totally automated. Level of automation: very high
- ✓ Assembly: very robust, components range up over 500% of end scale
- ✓ Self-guided menu, prevents the operator from making mistakes
- ✓ easy to connect, thank to smart & wide adapters range
- ✓ Protected by two big ultra-fine filters
- ✓ Display: Graphic
- ✓ Not any pump for waste oil (with metal particulate)
- ✓ Practice and immediate replacement of new and exhausted oil tanks
- ✓ Printer; will print each operation
- ✓ Protocol of use inside: special, proven by many years – elevated results granted
- ✓ Menu contains **BIZOL** list of oils range, + 3 universal oils
- ✓ It can charge small or large quantities of oil or additives independently
- ✓ It can also top up oil from the bottom of the oil-sump, from the check/drain plug
- ✓ Can be transported frequently for work in different places
- ✓ Complete calibration operations in 30 seconds
- ✓ Easy to maneuver thanks to large wheels

BIZOL ATF Cleaner +a50

BIZOL ATF Cleaner+ a50 is suitable to be used before AT fluid changes for all automatic transmissions. It dissolves disruptive deposits and residues providing optimal shifting performance and in this way extending the transmission service life.



WITH




WITHOUT

- **rapid and gentle cleaning**
- **allows for optimal shifting performance**
- **it does not pollute the environment**

How to use:

Add BIZOL ATF Cleaner+ a 50 to the AT gear oil at operating temperature (approx. 40°C) before the fluid change, then let the engine run for 10-15 minutes. Shift through all gears for the first 5-6 minutes. Then change the fluid and the ATF filter. The additive can also be used to flush steering gear systems (Power Steering) before changing the fluid. Specially designed for the BIZOL ATF Intelligence 2000 oil exchange machine.

250 ml 8005

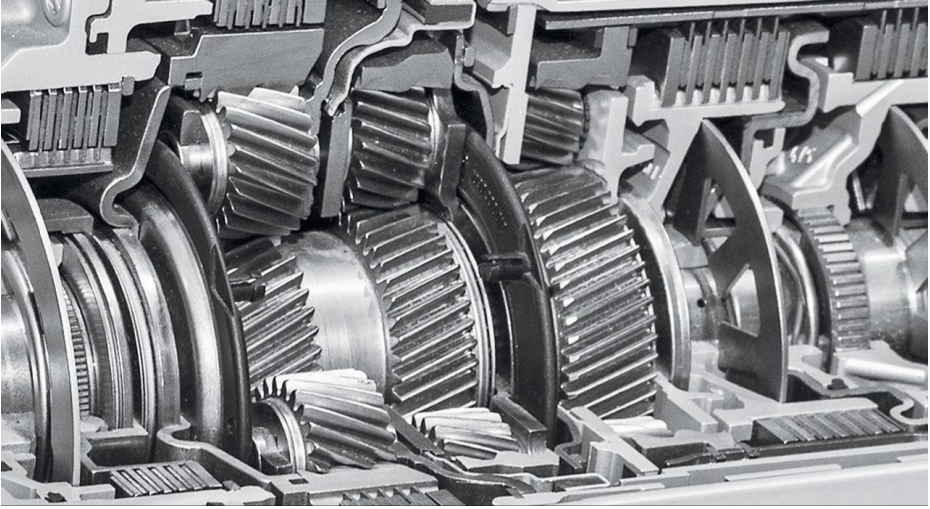

Everything about BIZOL is about German traditions of high standards and quality.

Our motor oils are in demand globally because we focus on the technical excellence of every product.

As this story of our passion unfolds, we are further inspired by developing solutions for complicated technical tasks, by generating optimal and innovative ways to reduce maintenance repairs, and even the amount of fuel and motor oil vehicles require.

Every product we create is designed to be cutting-edge.