Diesel System Clean+ d60

BENEFITS

- cleans injectors efficiently
- removes carbon deposits from intake valves and combustion chamber
- increases the performance of engine
- reduces fuel consumption and lowers emissions
- extends the life of the fuel system

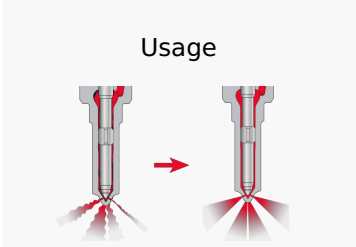

PRODUCT DESCRIPTION

BIZOL Diesel System Clean+ d60 is a fuel additive Made in Germany especially developed for maintaining the entire fuel system. Low or inconsistent fuel quality can cause carbon deposit build-up, inefficient ignition and combustion as well as poor power output. **BIZOL Diesel System Clean+ d60** effective cleans the entire fuel system, particularly injectors and valve seats, and prevents from corrosion. This product meets the demands of diesel engines with Common Rail and Pump-Injection high pressure injection and also protects the DPF. It improves the ignitability of the diesel fuel by increasing the cetane number up to 6 points. The regular use of this unique fuel additive leads to lower fuel consumption, noticeably smoother engine run and increased operational reliability.

The statements made in this document are made according to our current knowledge. They do not absolve the user from conducting his or her own examinations. A legally binding assurance of certain properties or suitability for specific use cannot be derived from our statements. Possibly existing laws and regulations concerning the handling and use of our products have to be observed personally by the user of our products.

Diesel System Clean+ d60

Available Packages

Size	Art. Nr	Languages
300 ml	8881	DE / EN / FR / ES / ZN / AR

Technical Data

Name	Value	Method
Appearance	slightly brown, clear	
Density at 15 °C	850 kg/m³	DIN EN ISO 12 185
Viscosity at 20 °C	2,3 mm²/s	
Flash Point	72 °C	

How to use

A 250 ml can is efficient for up to 70 litres of diesel fuel. Just pour it in the fuel tank before filling, it is self-mixing. For preventive maintenance use every 3rd tank filling. In countries with low fuel quality recommended for continuous use. A 1 l can is efficient for up to 280 litres of diesel fuel. Just pour it in the fuel tank before filling, as it is self-mixing. For preventive maintenance use every 3rd tank filling. In countries with low fuel quality recommended for continuous use.

The statements made in this document are made according to our current knowledge. They do not absolve the user from conducting his or her own examinations. A legally binding assurance of certain properties or suitability for specific use cannot be derived from our statements. Possibly existing laws and regulations concerning the handling and use of our products have to be observed personally by the user of our products.