



Benefits

1. fast and effective cleaning without dismantling
2. significantly smoother engine operation after cleaning
3. improves engine performance, reduces fuel consumption and emissions

Product Description

BIZOL Gasoline Intake Clean+ c36 is a high quality and extremely effective cleaner for removing carbon and grease deposits, resin, rubber, and oxidation in the intake and throttle area as well as on parts such as valves, actuators, EGR valves, injectors, butterfly valves, air mass meters and carburetor parts. No dismantling is necessary to clean the parts. A special long spray probe and its 360 degree valve makes it possible to easily reach even inaccessible places. The product is suitable for gasoline engines with and without turbocharger as well as for catalysts. We recommend using the product on a regular basis.

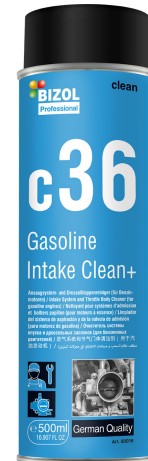

WITH



WITHOUT

Available Packages

500 ml Art. 80016

Technical Data

Name	Value	Method
Appearance	beige	
Scent	Characteristic	
Density at 20°C	0,80 g/cm ³	

Applications

Spray onto the air inlet, throttle valve, carburettor parts.

Usage

The aerosol should have room temperature. Best processing temperature 5 to 30°C. Before use, shake well the aerosol. Do not spray on hot surfaces. Remove the air filter to gain access to the air intake. Shake the can well before use. Apply the product on the needed parts and let it settle for 2-3 Minuten. Let it dry and if necessary wipe or brush off the remaining cleaner. **IMPORTANT:** Do not spray too much to avoid the formation of liquid pools. Then start the engine and let it run for a few minutes. Should the engine run irregularly, turn it off immediately. The product is not recommended for the use on laquered surfaces and synthetics. Make sure to test the product compatibility on a non-visible part of the material before applying.